


TAMBIEN

IOIL - Wall Mount

STANDARD FEATURES

- Heavy gauge spun shade, powder coated white inside
- 2 sizes available
- Assymetric shade ideal for sign and wall lighting
- 3/4" diameter curved arm, 4 styles available
- Heavy gauge wall mounting plate
- PL & MR units have wall F-can ballast canopy
- MH units have indoor remote mount ballast ❶
- HPF ballast standard

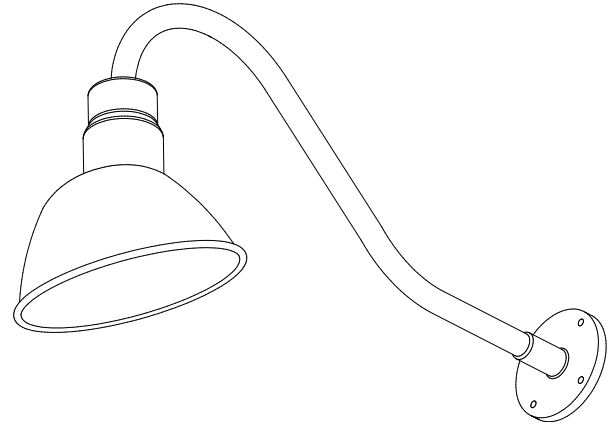

Damp location luminaire



Listed to applicable CSA and UL standards

ORDERING CODE GUIDE


SERIES	MODEL	SIZE	LAMP	ARM	VOLT	COLOR
IOIL	4010					
		S = small	INC75 MR75 ❷ PLC13 PLT26	A C D G	120 277 347 ❹	<u>TEXTURED FINISHES</u> TAL = textured aluminum TBK = textured black TBZ = textured bronze TWH = textured white
		L = large	INC150 MR75 ❷ PLC13 PLT26 PLT32 PLT42 50MH ❸ 70MH ❸ 100MH ❸ 35HPS 70HPS 100HPS 150HPS			<u>SMOOTH FINISHES</u> AL = silverdillo BK = black BY = buttercup yellow DBZ = dark bronze DO = deep orange EG = emerald green RB = royal blue RR = rich red WH = white RAL colors available

Notes:






- ❶ 10ft max for 50MH, 20ft max for 70MH and 100MH
- ❷ Use lensed MR16 only
- ❸ Open luminaire, use medium base protected lamp
- ❹ Consult factory

TAMBIEN

IOIL - Wall Mount



DIMENSIONS

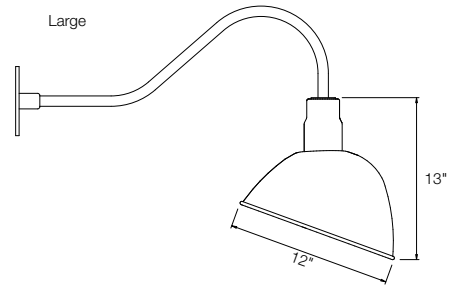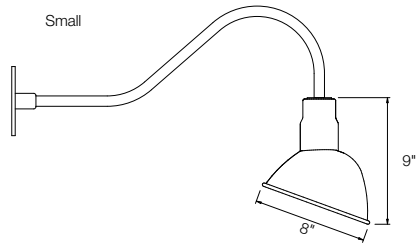

Arm Styles

