


TAMBIEN

SMVS - Low Profile Square

STANDARD FEATURES

- Die-cast aluminum housing
- Low glare wide distribution Lexalite 306 polycarbonate lens with UV inhibitors
- Shallow profile of 6.25", great for low ceiling garage lighting application
- Highly reflective inner reflector
- Heavy gauge lens frame
- Standard finish powder coat dark bronze

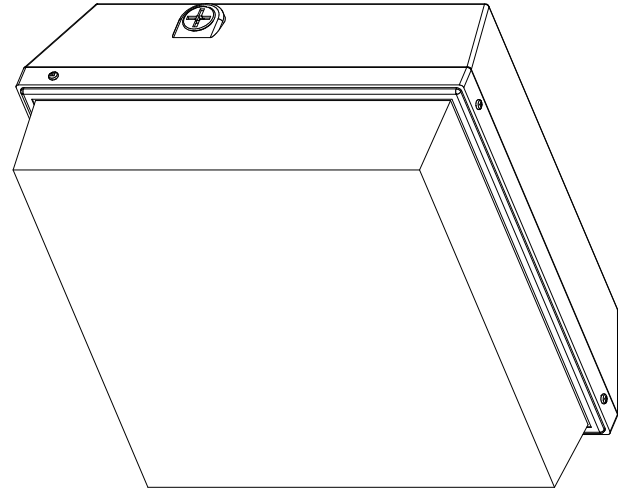


Wet location luminaire



Listed to applicable CSA and UL standards

ORDERING CODE GUIDE

SERIES	MODEL	LAMP	VOLT	COLOR	OPTIONS
SMVS	1430				
		PLC26	120	<u>TEXTURED FINISHES</u>	TPS = tamper resistant screws
		PLT32	277	TAL = textured aluminum	
		PLT42	347	TBK = textured black	
		35HPS		TBZ = textured bronze	
		50HPS		TWH = textured white	
		70HPS		<u>SMOOTH FINISHES</u>	
		100HPS		AL = silverdillo	
		150HPS		BK = black	
		50MH		BY = buttercup yellow	
		70MH		DBZ = dark bronze	
		100MH		DO = deep orange	
		175MH		EG = emerald green	
				RB = royal blue	
				RR = rich red	
				WH = white	
				RAL colors available	



TAMBIEN

SMVS - Low Profile Square

DIMENSIONS

