

# NIMBUS

## HPDL - Pendant



PROJECT

DATE

COMMENTS

### STANDARD FEATURES

- Heavy Gauge Spun Aluminum Housing
- UV Stabilized Acrylic Reflector
- All Hardware Stainless Steel
- Dimming Driver



SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS
HPDL	500	812	DT = Dome Top	35W	4600	K27 = 2700K	120/277 UNV	DD = 0-10V Dimming Driver	TAL = Textured Aluminum TBK = Textured Black TBZ = Textured Bronze TWH = Textured White CC = Custom Color RAL = RAL Color	ACBXX = Aircraft Cable Black Cord & Canopy, Specify Length ACWXX = Aircraft Cable White Cord And Canopy, Specify Length SMXX = Stem & Canopy, Specify Length HHCP = Hook Hanger	CFL = Clear Flat Lens SFL = Satinice Flat Lens PCR = Polycarbonate Reflector WG = Wire Guard SC30 = 30° Hang Straight MS = Motion Sensor
		816	RT = Round Top	50W	5440	K3 = 3000K					
		822	100W	15000	K35 = 3500K						
			150W	22500	K4 = 4000K						
			200W	30000	K5 = 5000K						
			240W	36000							
			300W	39000							
			400W	52000							
			500W	65000							

### ORDERING INFORMATION

SERIES	MODEL	SIZE	STYLE	LAMP LED	LUMENS	CCT CRI 80	VOLT	CONTROL	COLOR	MOUNTING	OPTIONS

ORDERING EXAMPLE: HPDL - 500 - 822 - DT - 100W - 15000 - K4 - 120/277 - DD - TAL - ACB48° - PCR

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

- |   |   |
|---|---|
| 1. Programmable drivers at the PACE factory | 4. Can be equipped with motion sensors for on/off functioning                     |
| 2. Color tunable                            | 5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation |
| 3. Capable of remote dimming                | 6. Bluetooth commissioning sensor capability for Android and iOS                  |



PACE Illumination 5500 West 111<sup>th</sup> Street | Oak Lawn, Illinois 60453 | 708-499-1700 | quotes@paceillumination.com

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.

REV DATE:  
02282024

# NIMBUS

## HPDL - Pendant



### MOUNTING

- Air craft cable and stem standard


### COLOR

- Textured or smooth polyester powder coat finishes
- RAL colors available

### DIMENSIONS


#### DT

Dome Top

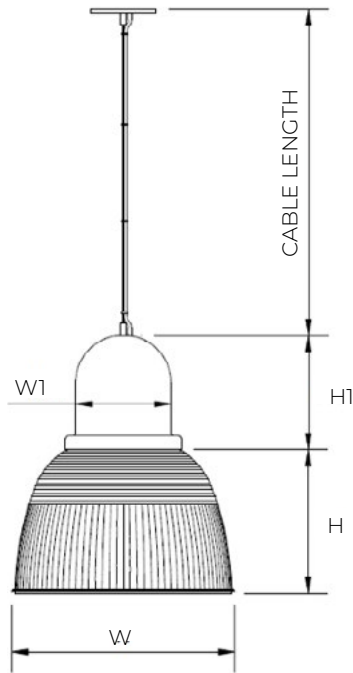

#### RT

Round Top

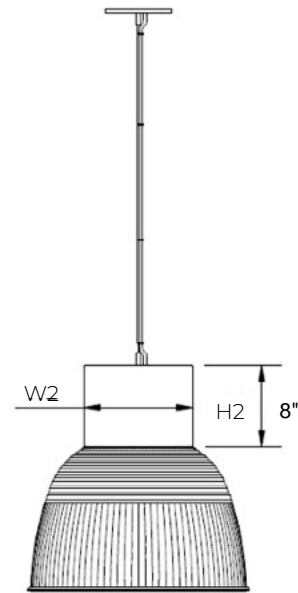

	W	W1	W3	H	H1	H3
<b>Small</b>	Ø12.4"	Ø5.5"	Ø6.0"	7.0"	7.3"	2.0"
<b>Medium</b>	Ø16.3"	Ø7.0"	Ø8.0"	10.5"	8.4"	2.0"
<b>Large</b>	Ø22.4"	Ø10.5"	Ø12.0"	12.1"	11.5"	2.5"



PACE Illumination 5500 West 111<sup>th</sup> Street | Oak Lawn, Illinois 60453 | 708-499-1700 | quotes@paceillumination.com

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.

REV DATE:  
02282024